


User's Manual of USB OTG BRIDGE

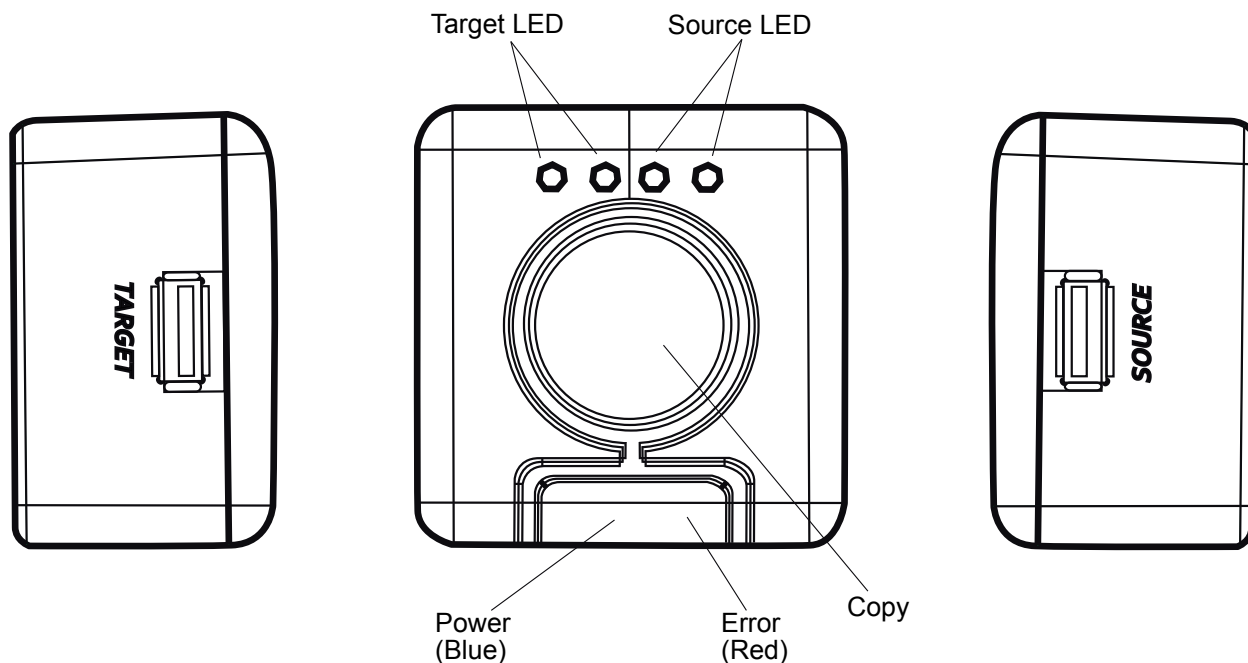

1. Press „Power Button“ to light on the „Power LED“. (Blue light)
Note: Blue light will flash when battery power is low.
2. Insert the USB devices into „Source Port“ and „Target Port“ respectively.
Note: Please make sure the available free space of Target device is bigger than the Source file.
(The storage media has to be available in FAT32 standard format).
3. „Source LED“ and „Target LED“ flash to detect the Source device and the Target device respectively. (Both are in Blue light)
4. When both Source LED and Target LED stop flashing, it's ready to copy.
5. Copy: Press the „Copy Button“ to start copying from „Source Port“ to „Target Port“.
Note: When data is transferred, the Source LED and the Target LED start to flash.
When both LED flashing together, the copy is done.
6. If the Power LED flashes red, the copy is incomplete.
7. Power saving: Over 30 seconds no working, power off automatically.
8. Each copy creates directory in sequence, for example, DIR0000,DIR0001,DIR0002.
Data won't be overwritten.
9. Optional copy modes: Root & Disk copy.
10. Battery power supports max. 600mA for two devices. (limited Pan drive, Card Reader)
Power adapter is required when using other USB devices.
11. Internal battery: 3*AAA battery.
12. USB power cable included.