

Slim 5x1 HDMI 4K2K Switcher

CS 1-5 L

Quick Installation Guide Ver. 1.0


All brand names and trademarks are properties of their respective owners

1

CONNECTION AND OPERATION:

- 1) Connect input ports of this Switcher to each HDMI source device.
(Input cables are optional) Please refer to connection diagram section.
- 2) Connect output port of this Switcher to HD display.
- 3) Insert the DC side of 5v power supply into the HDMI switch and then connect the AC side of the power supply into the wall outlet.
- 4) Turn on the power. Attention: Insert / Extract cable gently.

CONNECTION DIAGRAM:

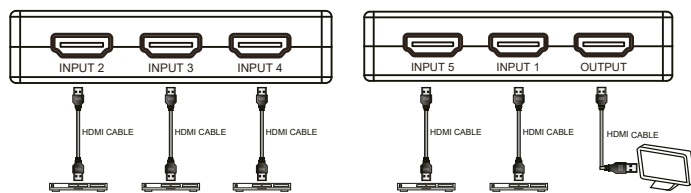

3

INTRODUCTION:

This is an intelligent 4K2K HDMI 5X1 Amplifier Switcher. It allows five HDMI source devices switched into one HD monitor or projector.

FEATURES:

This HDMI 4K2K Amplifier Switcher has many features that enable it to perform in a superior manner. Among those features you will find:

- plastic housing
- Multi-switching methods: intelligent, IR remote or by touch button
- Supports video resolution up to 4K2K.
- Supports 340MHz/3.4Gbps per channel (10.2Gbps all channel) bandwidth.
- Supports 16bit per channel (48bit all channel) deep color.
- HDCP pass-through.
- Supports uncompressed audio such as LPCM.
- Support 3D all format, including 1080p@24Hz, 720p@ 60Hz / 50Hz.

PACKAGE CONTENTS:

- 1× Slim 5x1 HDMI 4K2K Switcher
- 1× USB DC Power Cable
- 1× User Manual
- 1× Remote control
- 1× IR Cable

2

SPECIFICATIONS:

Cable for power supply not required for most device combinations.

Signal Inputs/Output	
Input DDC Signal	5 volts p-p (TTL)
Maximum Single Link Range	3840X2160@30Hz
Output Video	HDMI
Operating Frequency	
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	3.4Gbps/340MHz
Resolutions(HDTV)	
Interlaced(50&60Hz)	480i, 576i, 1080i
Progressive(50&60Hz)	480p, 576p, 720p, 1080p
Progressive(30Hz)	2160P
Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0 C to +35 C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10 C to +80 C
Storage Humidity	5% to 90 % RH (no condensation)
Power Requirement	
External Power Supply	DC Cable
Power consumption (Max)	5W
Accessories Adapter	
IR remote	

Note: Specifications are subject to change without notice

4