

MAXTRACK®

CS 26-4 L

HIGH-DEFINITION MULTIMEDIA INTERFACE

8K UHD Splitter 1×4

USER MANUAL



Always Enjoy Super Quality

1.0 Introduction

The 1x4 HDMI splitter distributes 1 HDMI source to 4 HDMI displays at the same time. It provides solutions for HDTV retailers, show sites, HDTV, STB, DVD and projectors, factories, space, security issues, data center control, information distribution, conference room presentation, school and corporate training environments.

2.0 Specification

Input Video Signal	0.5-1.0 Volts P-P
Input DDC Signal	5 Volts P-P (TTL)
Max Single Link Range	8K/ 60Hz
Output Video	HDMI 2.1 + HDCP 2.3/1.1/1.2/1.3/1.4/2.0/2.2
Resolutions DTV/HDTV	480P/576i/576P/720P/1080i/2160P/4320P
HDMI Version	HDMI 2.1 to specification
EDID Duration	4 seconds
Power Supply	5V/2A
Frequency Bandwidth	48Gbps
Deep color	30 bit, 36 bit, 48 bit per pixel
Digital Audio Format	DTS-HD/ Dolby Atmos/ Dolby true HD/Digital 7.1CH/ LPCM 7.1/ DTS/ Dolby AC3/ DSD/ DTS:X

3.0 Connection


- Connect the input source and output displays to the HDMI splitter. Please refer to the connection image.
- Connect the DC 5V power supply to the splitter. Please note that higher voltage power supplies may damage the splitter.
- When the input source and output displays are connected and turned on, the corresponding LED will light up.

Attention: In order to protect the splitter and your devices, please make sure that the splitter is powered off before connecting or extracting the video and the monitor. Please plug and unplug the HDMI cable gently.



4.0 Box Contents


Item	Qty
8K 60Hz HDMI Splitter 1x4	1 PC
5V 2A Power Adapter	1 PC
User Manual	1 PC

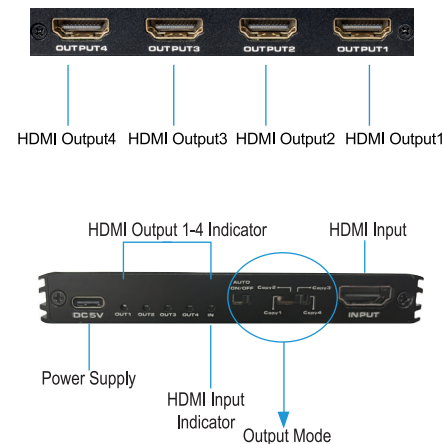

Auto Mode: Automatic combination of output 1, output 2, output 3 and output 4 display


- Copy 1 Mode: Copy EDID of output 1 display
- Copy 2 Mode: Copy EDID of output 2 display
- Copy 3 Mode: Copy EDID of output 3 display
- Copy 4 Mode: Copy EDID of output 4 display

1 x 4 HDMI Splitter Mode

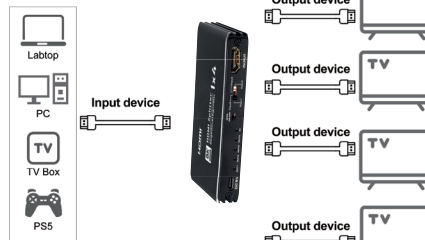

Mixed Mode Different output resolutions

e.g.: TV 8K; Monitor 1080p

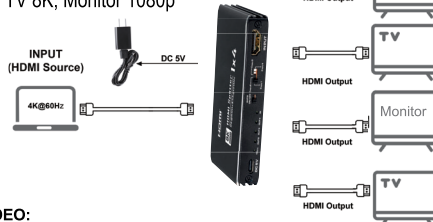

VIDEO:

- 8K@60Hz 4:4:4, HDR Dolby Vision, HDR 10+, 4K@120Hz

VIDEO:

- Supports HDCP2.3, HDMI2.1, EDID, 3D, RGB 4:4:4, Ultra HD Max Resolution 8K@60Hz(4:4:4)

AUDIO:

Supported DTS-HD, Dolby-trueHD, DTS, Dolby-AC3, DSD etc.

TIPS:

- Plug and play, no software required, easy to access.
- Transfer HDMI input output signal up to 26ft (Input 16 ft and output 10ft).
- Smart EDID management: EDID HDMI Splitter provides 3 switching modes that can be met for different resolution needs. With flexible EDID switching you can set the desired output signal for your video sources to improve compatibility with your display or projector and works stability.
- HDMI Input compatible with any HDMI device: such as PS4/Roku/Fire TV/Blu-ray players/PS4 Pro/ /PS3/Beamer/Laptop and other HDMI signal source.



Transmedia Kabelverbindungen GmbH
 Profilst. 11, D-58093 Hagen
 E-Mail: info@transmedia-germany.de
 Order-No.:

Revised 0
2024