

HDMI® 4K Bi-Direction Switch CS 32

INSTALLATION AND SAFETY PRECAUTIONS:

1. Cables must be placed well, where it would not be stepped on or pinched. Make sure HDMI cables are fully inserted into ports.
2. To provide sufficient ventilation during use, make sure there is at least 1 inch of clearance on each side of the device (except the side where it rests on a flat surface).
3. Do not set up this product adjacent to a water source or an environment that has excessive moisture.
4. Place this product on a flat surface and keep it out of reach of children.


FEATURES:

- 1 HDMI input to 2 HDMI outputs
- 2 HDMI inputs to 1 HDMI output
- No power source needed
- Manual select push button to alternate between modes
- Dual LEDs to display status
- 3 HDMI type A plug female connector
- Supports 3D
- HDMI Resolution: 2160p/1080p/1080i/720p/576p/480p/480i
- Operating Temperature -15 to +65 C
- Operating Humidity 5 ~ 90% RH (no condensation)
- Storage Humidity 5 to 90% RH (no condensation)

PACKAGE CONTENTS:

- Main unit x1
- User Manual x1

Example of 2 Inputs to 1 Output:

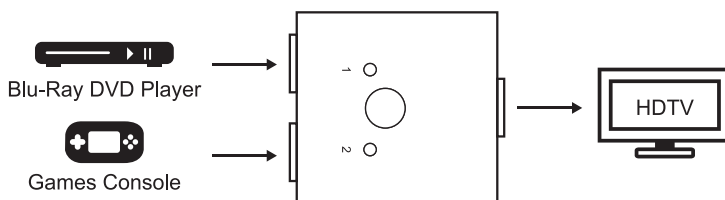

Example of 1 Inputs to 2 Output:

