

AV to HDMI® converter, with upscaler

CS 37 L



AV to HDMI® signal converter, AV (CVBS) composite video signal and stereo audio signal are converted into HDMI® digital signal, so that ordinary DVD, camcorder and other composite audio and video signals are output as high-definition HDMI® signal, which is convenient to connect to LCD TV and high-definition display

Content: 1x Converter, 1x USB connection cable

MAXTRACK®

Transmedia Kabelverbindungen GmbH, Profilst. 11, 58093 Hagen, Germany

E-Mail: info@transmedia-germany.de

Rev1




The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Product Feature:

Input signal format: AV (red, yellow, white) CVBS composite audio and video

Output signal: HDMI® 1080P 60Hz / 720P 60Hz

Support video input standards: PAL, NTSC3.58, NTSC4.43, SECAM, PAL/M, PAL/N. Compatible with HDCP protocol

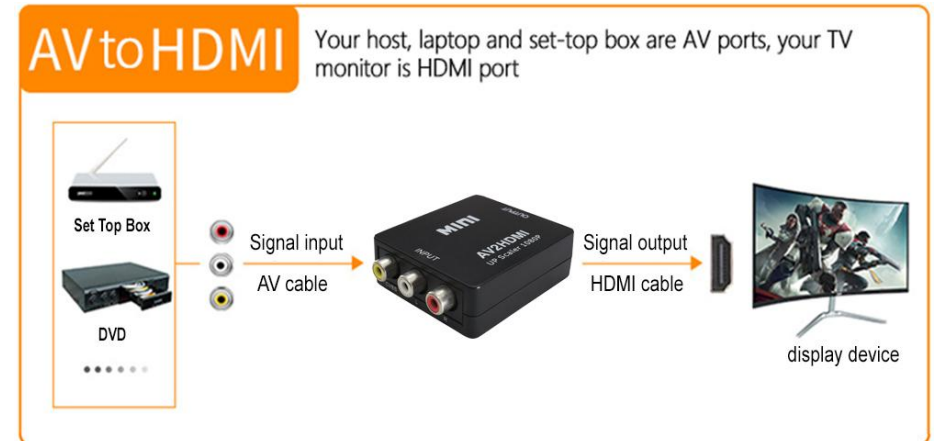

Product Specification:

1. Hardware transformation, plug and play, without any software driver
2. According to HDMI® 1.3 specification
3. A set of AV inputs: a set of HDMI outputs
 - A. Input: ----- VIDEO 1x
L / R 1x
 - B. Output: ----- HDMI 1x

