


# WI-FI SMART POWER STRIP

## NW 11 L



### Safety Instructions

The product is powered by electricity. In order to avoid burns, fire and electric shock and make sure the safe and correct use of the system, please read the instructions carefully before using this product.

- Don't connect a device that exceeds the max. load current for this product, otherwise may cause possible product damage or personal injury.
- Don't use the product if it is damaged in any way, shape or form.
- Don't attempt to repair, disassemble or modify this product.
- Don't use the product in a humid, moist or wet environment. Keep the device dry and clean at all times.
- Don't clean the product while power is still connected.
- Don't place the product near any heat source or in direct sunlight, and make sure the product is out of children's reach.
- Don't touch the product with wet hands.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.




#### Disposal:

The product with this mark indicates that this product shouldn't be disposed with other household waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the local recycle service or contact your point of purchase to dispose the product.

### Packing List

Power Strip x1  
Instruction Manual x1

### Power Strip Overview



#### 1. USB Port

#### 2. Outlet

#### 3. On/Off Button

Short press to turn on/off the device.

Long press to change the pairing indicator into flashing state to reset your smart plug to defaults. Only do this if you are sure you want to clear all previous settings.

#### 4. Plug

#### 5. Manual Overload Switch

Resets the strip without unplugging or plugging it again while it automatically shuts off by sensing a current overload.

### Install the "Smart Life" APP

1. You will find the "Smart Life" app on Apple App store, Google Play, or scan the QR code below and install it;
2. Enter the register/log-in interface. Enter your email address to register your free account and receive the verification code.



The free app "Smart Life" is compatible with mobile devices that support iOS 8.0 above, Android 4.4 above .

### Connecting Your Socket with APP

#### A. Easy Mode [Recommended]

1. Please make sure the mini socket is connected to electricity, then open the "Smart Life" APP, tap the "ADD DEVICES" or the "+" at the upper right corner of the page and select "Electrical outlet;"
2. Please wait for the indicator to flash quickly, or long press on/off button of the device for 5 seconds until indicator light quickly flashed, the interface page already stepped into "Add Device" page as the above;
3. Make sure the indicator light is flashing rapidly and confirm it in app;
4. Choose the local WIFI and enter the correct password and confirm;
5. Wait for configuring successfully, then tap "Done".

#### B. AP Mode

1. Change to "AP Mode" if connecting failed in "Easy Mode". The AP Mode is at the upper right corner of the "ADD DEVICE" page;
2. Long press on/off button until the indicator light flashes slowly;
3. Make sure the indicator light is flashing slowly and confirm it in App;
4. Choose the local WIFI and enter the correct password and confirm;
5. Tap "Connect Now", choose WIFI hotspot named "SmartLife xxx", then return to the "Smart Life" application;
6. Wait for configuring successfully, then tap "Done".

### Getting to Know "Smart Life" APP

#### A. Devices

You can add listed devices by tapping the "+" at the top right of this page.

#### 1. Switches


Switches allow you to turn on/off your device anywhere, As long as you have an internet connection you can control the device in your home. Tap the icon at the upper right of the page, you are able to modify the device name or even create a group (If you have a number of plugs and devices), which means you can turn multiple devices on or off at the same time.

#### 2. Timer

Schedule the device "lights" to turn on when you wake up or to automatically turn on when you get home. Turn devices on and off at different time to let people know that someone is home while you are away.

#### 3. Exit Time

You can set the devices on or off after the specific time as you want with this function.

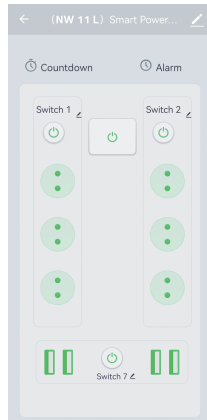


## B. Scenes

With this function, you can create your characteristic scenes as you want.

## C. Profile

Profile is the entrance for the users to manage personal information, which mainly show the following information:

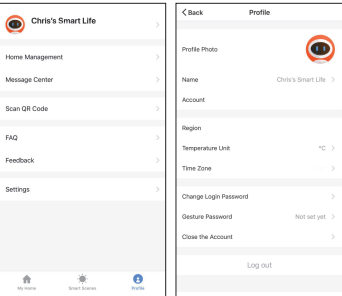


-06-

## Using Amazon Echo Quick Guides What You'll Need...

- Amazon Alexa APP & Account.
- Smart Life APP & Account [Users need to register your own account. Select your region.].
- Echo, Echo Dot, Tap or other Amazon voice operated devices.
- Mini Smart Socket.
- Tip: Rename the device after configuring successfully, The name of the device is recommended to use easy pronunciation of the English words.

## Set Your Echo Speaker by Alexa APP


1. Sign in with Alexa account & password [If not registered, sign up first]; After login, click the menu at the top left, then click "Settings", and choose "Set up a new device";
2. Choose a device [for example, Echo]. When the right page appears, long press the small dot on your Echo device until the light turns to yellow. Then click "Continue" on App. (Note: the mobile phone can not open a variety of VPN software at this time);
3. Choose users' WIFI and wait for a few minutes;
4. After an introduction video, click next step, it will turns to "Home" page automatically. Now the Echo is connected to Alexa APP through WiFi successfully.

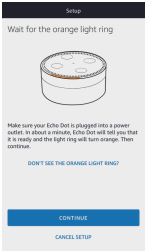

-07-

## Enable Our Skill in Alexa APP

1. Choose "Skills" in the options bar, and then search "Smart Life" in the search bar; Select "Smart Life" in the search results, and then click "Enable".
2. Input the user name and password that you had previously registered; When you see the right page, it means the Alexa account is linked with Smart Life account.

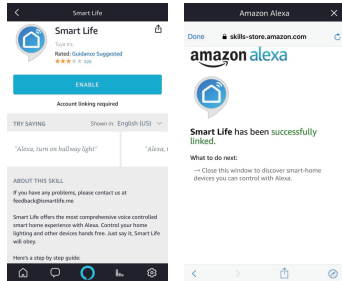

-08-

## Control Smart Socket by Voice


After the previous operation, you can control the socket via Echo.

1. Discovering devices: Firstly, users need to say to Echo: "Echo [or Alexa], Discover my devices." Echo will start to finding the devices which is added in Smart Life APP, it will take about 20 seconds to show the result. Or you may click "Discover devices" in Alexa APP, it will show the devices that found successfully. Note: "Echo" is one of the wake-up name, which can be any of these three names [Settings]: Alexa/Echo/Amazon.
2. Support Skill List User can control devices by instructions like below:  
Alexa, turn on [fridge socket]  
Alexa, turn off [fridge socket]  
Attention: The name of the device must be consistent with the addition of Smart Life App.



transmedia GmbH,  
Profilstr. 11, D-58093 Hagen

-09-

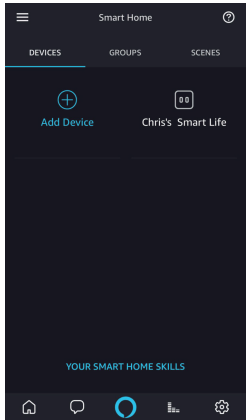

-10-

## Specifications

Item No.	NW 11 L
Dimensions	260x110x40mm (10,2"x4,3"x1,6")
Material	PC+ABS V0 Fire Retardant
Plug Type	EU Standard
Cable Length	180cm (70,9")
Number of Outlets	6
USB Charging Port	4
Input Voltage	AC 100-240V
Frequency	50/60 Hz
Wireless Protocol	2.4GHz
USB Port Output	5V/4A
Max, Load Current	16A
APP Control	Tuya/Smart Life
Voice Control	Alexa/Google Home
Manual Overload Switch	Yes
Certification	CE, RoHS

**Note:** The guidebook is for illustration purpose only and the latest App may vary.

Hereby, Transmedia Kabelverbindungen GmbH declares that the radio equipment type NW 11 L is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.transmedia-germany.com/download>

-11-